






- **Maximum Load - 40 lbs (18 kg)**
- **Smooth Motion, Solid Design**
- **Feed-through Wiring Available**
- **100% Duty Cycle Motors**
- **Upright or Inverted Operation**
- **Pre-position and 360° Models Available**

## Heavy Duty Weatherproof Pan/Tilts



### PT9440, PT9441 Series

The PT9440 and PT9441 Series weatherproof pan/tilts are solid, robust units constructed with corrosion resistant hardware. These devices are built to carry a load of 40lbs (18kg) and accurately position camera/housing packages to achieve a desired field of view.

The 100% duty cycle motors permit continuous operation on all models. Low speed worm drives and flexible motor mounts offer quiet, smooth motion. The use of impedance and overload protected motors, long life limit switches, and permanently lubricated bearings reduce maintenance and provide reliable operation.

# SPECIFICATIONS

## ELECTRICAL

Model No. <sup>1</sup>	Rated Motor Voltage, Voltage Range
NON-FEED-THROUGH MODELS	
<b>Standard Models - 0° to 345°</b>	
PT9440-6	110 VAC, 60 Hz, 108 to 132
PT9440-2	24 VAC, 60 Hz, 23 to 26.4
<b>Pre-position Models - 0° to 345°</b>	
PT9440-6P	110 VAC, 60 Hz, 108 to 132
PT9440-2P	24 VAC, 60 Hz, 23 to 26.4
FEED-THROUGH MODELS	
<b>Standard Models - 0° to 345°</b>	
PT9441-6	110 VAC, 60 Hz, 108 to 132
PT9441-2	24 VAC, 60 Hz, 23 to 26.4
<b>Pre-position Models - 0° to 345°</b>	
PT9441-6P	110 VAC, 60 Hz, 108 to 132
PT9441-2P	24 VAC, 60 Hz, 23 to 26.4
<b>Continuous Pan Models - 0° to 360°</b>	
PT9441-2SL	24 VAC, 60 Hz, 23 to 26.4
<b>Continuous Pan Models - 0° to 360° with Pre-position Models</b>	
PT9441-2PSL	24 VAC, 60 Hz, 23 to 26.4
1. The total power for all models, with both motors running, is <b>20 W</b> .	

### Connectors:

#### PT9440 Series

Power: Via 24-pin connector on base.

Ground: Screw connection for grounding on base.

#### PT9441 Series

Power: Via 24-pin connector on base through to 3-conductor cable on pan head.

Lens and Accessories: Via 24-pin connector on base through to 10-conductor cable on pan head.

Video: Via BNC connector on base through to flying lead coax on pan head.

Ground: Screw connection for grounding on base.

### Recommended Maximum Cable Lengths:

Model Voltage	Wire Size		Distance	
	mm <sup>2</sup>	AWG	Feet	Meters
24 VAC	0.5	20	140	43
	1	18	230	70
	1.5	16	360	110
	2.5	14	590	180
	4	12	940	287
110 VAC	0.5	20	2200	671
	1	18	3500	1067
	1.5	16	5500	1677
	2.5	14	9000	2744

1. Values calculated at 68 °F (20 °C) using stranded tinned copper wire common ground (neutral), and with both PAN and TILT motors operating simultaneously.

## ELECTROMAGNETIC COMPATIBILITY

**Safety:** 60 Hz Models: UL & cUL.

UL: UL 2044.

cUL: CSA 22.2, No.1.

## MECHANICAL

**Mounting:** These units are designed for either upright or inverted installations. **When mounting in an inverted position outdoors, unit must be enclosed in a weatherproof enclosure.** They can only be mounted upright or inverted; never horizontally.

#### Pan Range (Movement in horizontal plane):

Standard Models: 0° to 345° maximum.

**Continuous Pan Models:** 360° continuous rotation.

**Pan Speed:** 7°/sec.

**Tilt (Movement in vertical plane):** +30° to -90° from horizontal.

**Tilt Speed:** 1.2°/sec.

**Maximum Load:** 40lb (18kg) or 260 lb-in (297 kg-cm) torque with center of mass located 3.12 in (79.2 mm) from the center of the tilt table.

**Construction:** Cast aluminum base and yoke, corrosion resistant plastic cover.

**Finish:** Light gray.

**Dimensions:** See **Dimensional Outline**.

**Weight:** 15.5 lbs (7.05 kg).

## ENVIRONMENTAL

#### Temperature:

Operating: -22° F to +122° F (-30° C to +50° C).




Storage: -40° F to +140° F (-40° C to +60° C).

**Vibration:** 3 g swept sine wave, 15 Hz to 2000 Hz.

**Shock:** 50 g, 11 ms, 1/2 sine.

**Enclosure:** Tested to NEMA-3 requirements (upright mounting). IP54 Design.

**PT944x SERIES DIMENSIONAL DRAWING**

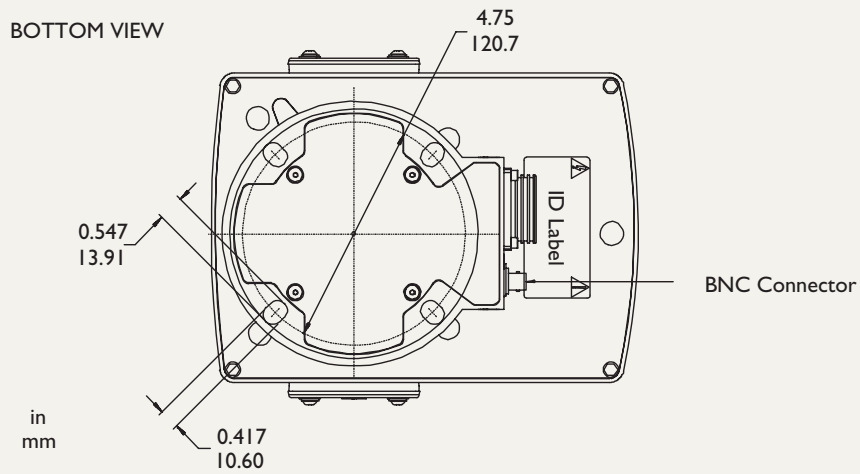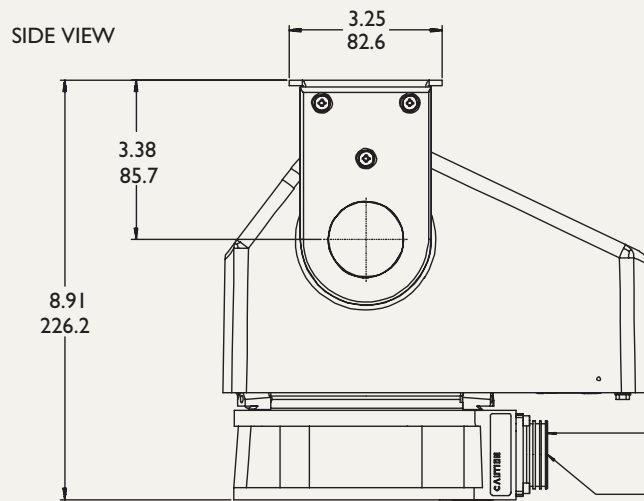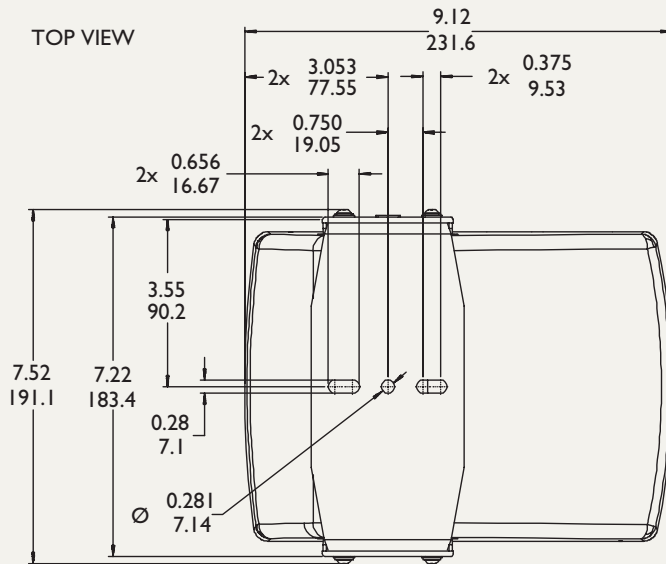



mechtronics

©2003 Aigis Mechtronics

1124 Louise Road, Winston-Salem, NC 27107-5450

Tel: 336.785.7740 Fax: 336.785.7744

[www.aigismech.com](http://www.aigismech.com)

Data subject to change without notice

04/04 rev\_01  
Printed in U.S.A.